


Release Hooks

35 Kn hook for Rescue Boat & Liferaft

With a safe working load of 3.5tonnes, the SLA3.5 is perfectly suited for various types of liferafts & rescue boats and their associated launching appliance and because of the inherent safety of the load-over-centre design it can only be released when the raft or boat is waterborne, with little (up to 150kg) or no load on it. It fully complies with the latest SOLAS & LSA Regulations.

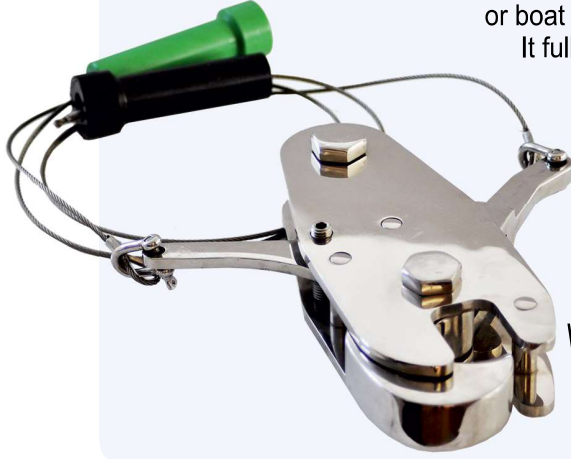

Automatic release:

When the craft becomes waterborne by engaging the Actuating Mechanism just prior to splashdown.

Manual release:

When waterborne if auto-release is not possible due to added load on the hook while being towed or when sea conditions worsen.

22 Kn Hook for Liferaft

“Off-Load” release mechanisms, fitted in the automatic release hooks used for the liferafts, are designed to be operated (opened) when the load applied to them is removed — i.e. when the raft has been lowered and becomes waterborne.

Quick release hook is used for Liferaft SWL 22kN. All components of the this hook are designed for a long life durability under arduous marine conditions and manufactured according to the latest regulation. They are tested based on the LSA code and have WHEELMARK.



15 Kn Hook for Rescue Boat

“On-Load” disengaging gears, fitted in and rescue boats, are designed to be operated (opened) when the boat is lowered and becomes waterborne, whether or not a load is being applied to it by the movement of the ship or the sea.

Quick release hook is used for rescue boat SWL 15kN.

All components of the this hook are designed for a long life durability under arduous marine conditions and manufactured according to the latest regulation.

They are tested based on the LSA code and have WHEELMARK.

